

I...I Shared properties
CRAYON E165/A195

- Power consumption: 12 W
- Colour temperature: 2,700 K (warm white) or 3,500 K (neutral white)
- Luminous flux: 650 lm
- Luminaire efficiency: 54 lm/W
- Colour reproduction: CRI Ra 94
- Service life: 50,000 h
- Glare control to UGR 19
- Built-in, patented, sensor-controlled system for stabilising the colour temperature over its entire service life
- Can be dimmed using standard commercial dimmers for low voltage halogen and incandescent lamps (certified types only; refer to installation instructions)
- Includes decorative cover ring
- Includes control gear
- Protection class I
- Mains voltage: 230 V / 50 Hz
- Can be used with 220 V DC group battery
- Product guarantee: 3 years
- Please note: if using luminaire unit with motion detector, the motion detector must have a relay-switched output

CRAYON E165 LED



- I...I
- Luminaire housing made of die-cast aluminium and sheet steel
- IP 44 when installed in closed ceilings
- Electrical supply connected via 3-pole terminal block
- Emergency lighting models with local battery available on request
- Through-wiring for 3 x 1.5 mm² supply cable
- Two fixing clips provided for tool-free installation in ceilings of thickness 10–25 mm

Recessed LED downlight,
cover ring silver-matt painted finish inside

- 1/12 W LEDs neutral white
- 1/12 W LEDs warm white

Accessory

- Cover rings anodised aluminium finish inside, white outside
- Cover rings silver-matt painted finish inside, white outside
- Cover rings white
- Concrete casting surround DA175

RD/RO kg Order no.


150/165 1.3 60 812 533
150/165 1.3 60 812 532

60 812 416

60 812 516

60 812 515

60 800 608

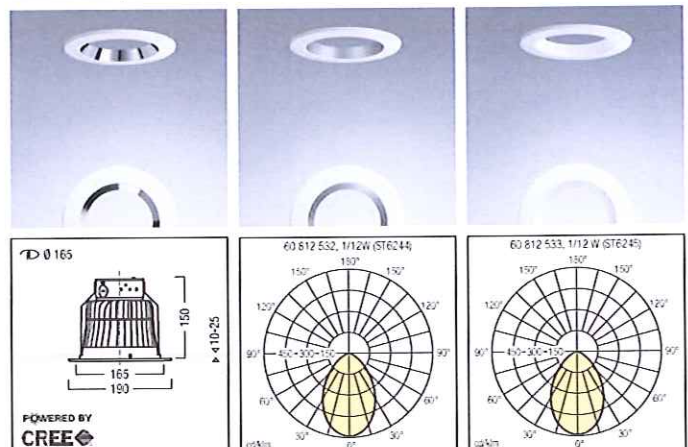

CRAYON A195 LED



- I...I
- Aluminium and sheet-steel surface-mount housing painted white (approx. RAL 9003)
- Emergency lighting solutions combined with ONLITE RESCLITE LED
- Connected to electrical supply by 3-pole Wieland connector (included with luminaire)
- Luminaire unit can be fitted quickly on ceiling using twist-and-lock mechanism

Surface-mounted LED downlight,
cover ring silver-matt painted finish inside

- 1/12 W LEDs neutral white
- 1/12 W LEDs warm white

Accessory

- Cover rings anodised aluminium finish inside, white outside
- Cover rings silver-matt painted finish inside, white outside
- Cover rings white

H/O kg Order no.

219/195 2.1 60 812 537
219/195 2.1 60 812 536

60 812 416

60 812 516

60 812 515

