

PopPack Pro battens and modules

THORN

96504901 POPPACK LED E3 KIT

LED	1W LED_90	EN 60598-2-22	T _a 5/25	F	IP20	IK02	⊕	CE	850 °C	
-----	-----------	---------------	---------------------	---	------	------	---	----	--------	--

PopPack Pro battens and modules

A standards compliant, 3 hour manual test LED emergency conversion module for all PopPack Pro battens and modules luminaires (except 14W T16). Plug and play fitting, without the need for any tools.


Dimensions: 145 x 55 x 85 mm

Total power: 2 W


Weight: 0.4 kg



TLG_POPP_F_LEDE3M.jpg

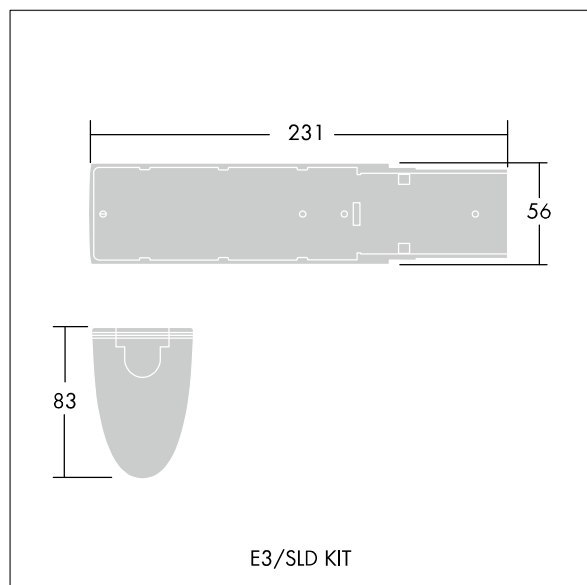

TLG_POPP_M_SLEM.wmf

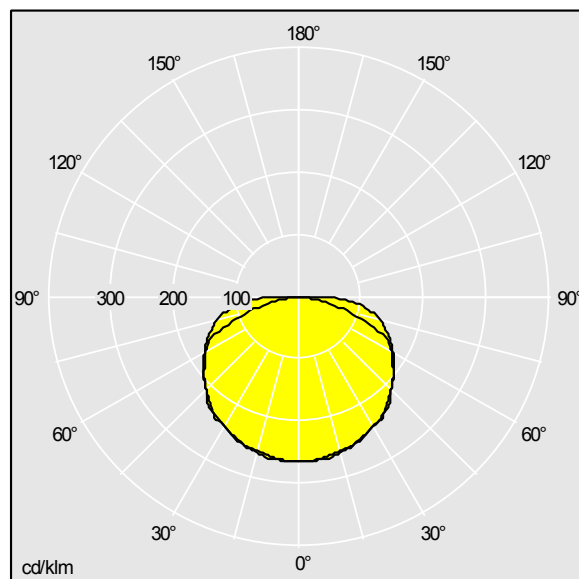

TLG_SP_0038391.ltd

Lamp position: EM - emergency operation

Lamps: 1 x LED_90 / 1W

Total luminous flux: 90 lm

Ballast: LED_Con Tridonic EM powerLED Basic



Connected Load: 2 W Lambda = 0.95

LOR: 1,00 ULOR: 0,00 DLOR: 1,00

PopPack Pro battens and modules

96504901 POPPACK LED E3 KIT

THORN

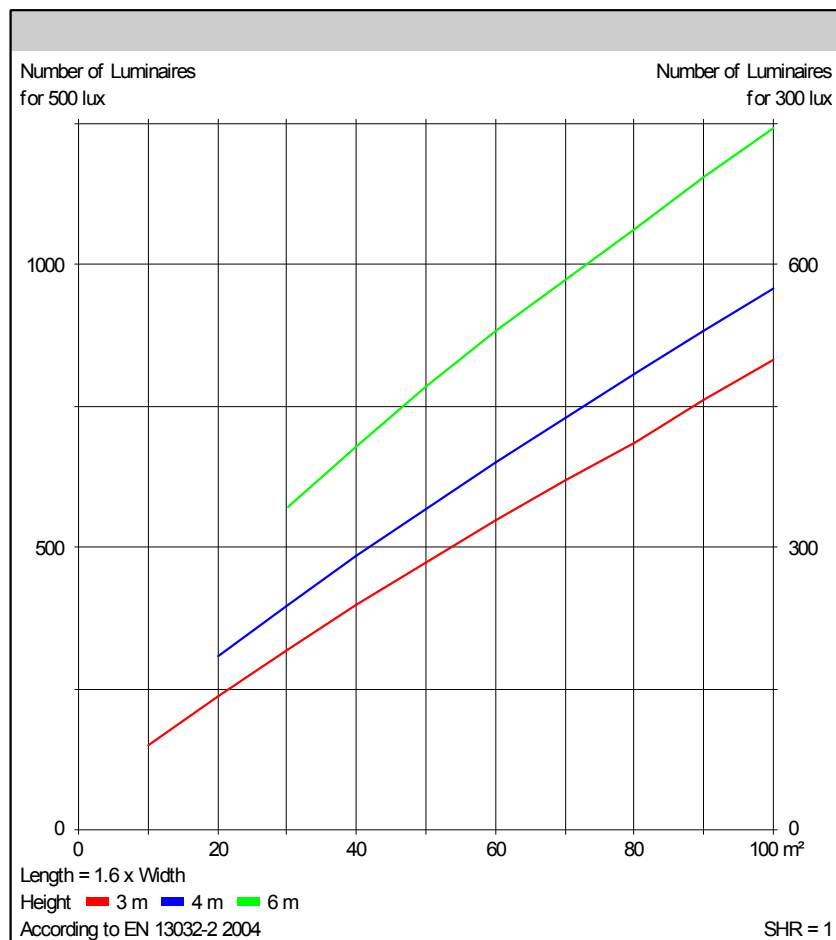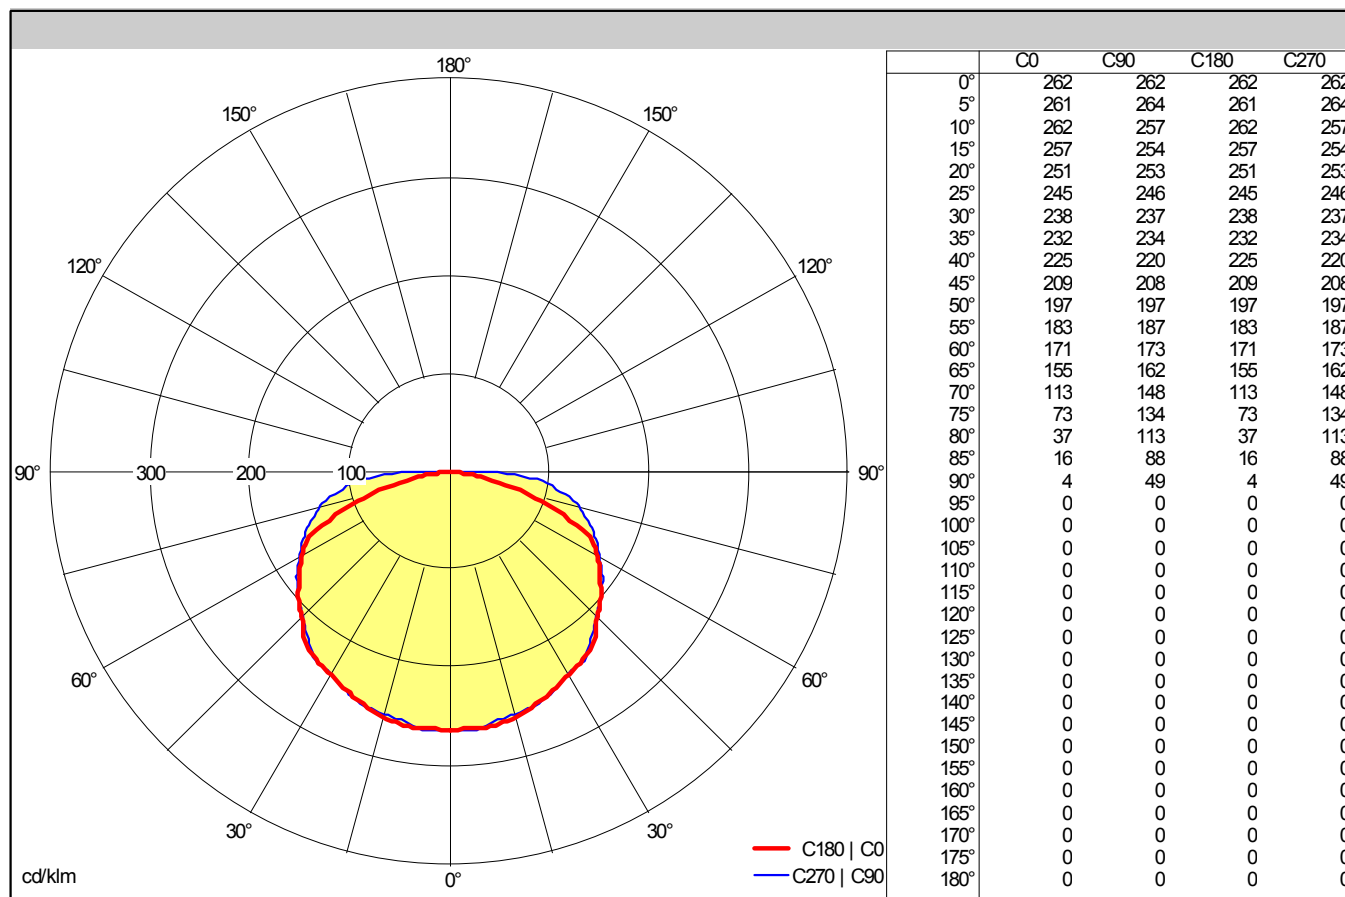

Light output ratio	
LOR	100 %
ULOR	0 %
DLOR	100 %
FFR	0.00 (0:100)
BLF	1.00

Glare Evaluation	
X = 4 H, Y = 8 H	S = 0.25 H
Reflection factors	70/50/20
UGR transversal	>28
UGR axial	>28

Classification	
LITG	A30
EN	
BZ	BZ5
UTE	1.00 G
Flux Codes	38 68 91 100 100

Photometric data file: TLG_SP_0038391.ltd