



Change over


NSM-cables (750 mm)
Cables power supply for
main incoming line (N)
and standby line (S)

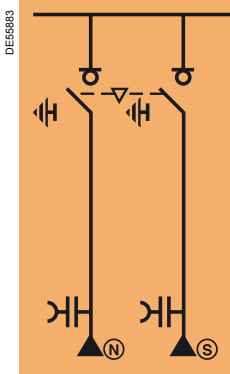


NSM-busbars (750 mm)
Busbars power supply for
main incoming line on right
and cables (N)
for standby line (S)

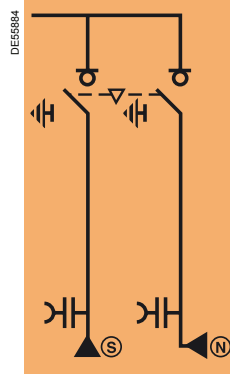

NSM-busbars (750 mm)
Busbars power supply for
main incoming line on left
and cables (N)
for standby line (S)

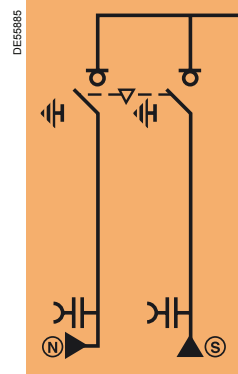

Electrical characteristics

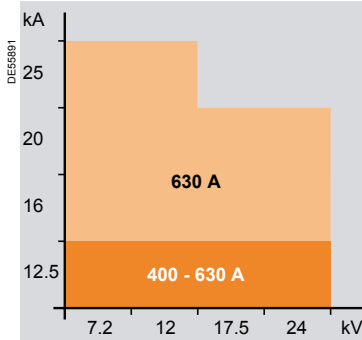

Basic equipment:

- switches and earthing switches
- three-phase busbars
- connection pads for dry-type cables
- voltage indicators
- mechanical interlocking
- motorised operating mechanism CI2 with shunt trips
- additional enclosure
- automatic-control equipment

Version:

- 630 A or 1250 A three-phase busbars

Optional accessories:

- auxiliary contacts
- key-type interlocks
- 50 W heating element
- stands footing
- telecontrol