




Actionneur standard

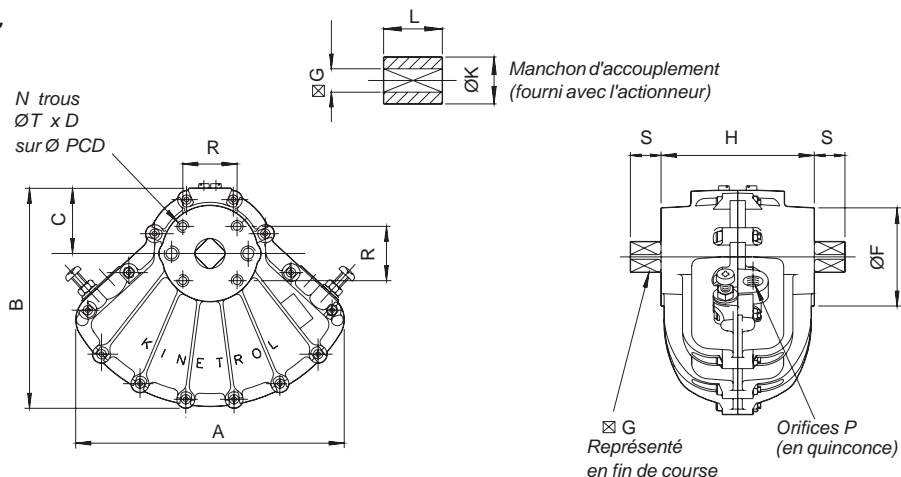

DIMENSIONS DE L'ACTIONNEUR STANDARD

Modèle Actionneur	A mm	B mm	C mm	□G mm	H mm	ØF mm	S mm	N No.	T ISO	D mm	R mm	PCD mm	P ISO	ØK mm	L mm	Masse kg
OMO	32.0	30.7	12.5		36.0		10.0	4	M3	5.0		16.0	M5			0.12
014	71.4	60.5	14.8	4.8	37.0			Voir notice K041					G ¹ / ₈	9.5	12.7	0.28
014A	71.4	57.3	14.4	4.8	38.5			Voir notice K041				19.0	G ¹ / ₈	9.5	12.7	0.25
024	93.0	76.0	24.1	8.0	50.0		10.0	4	M4	8.0	18.0	25.5	G ¹ / ₈	16.0	20.0	0.44
034	113.0	91.4	28.0	9.0	60.0	33.6	12.0	4	M5	10.0	22.0	31.1	G ¹ / ₈	18.0	22.0	0.73
054	136.0	112.0	33.6	9.5	67.0	45.0	13.0	6	M5	10.0		34.9	G ¹ / ₈	19.0	25.4	1.28
074	178.0	146.0	43.4	16.0	100.0	64.0	20.0	4	M8	16.0	36.0	50.9	G ¹ / ₄	32.0	40.0	3.30
084	179.0	155.0	41.4	14.3	99.0	63.5	19.0	6	M8	16.0		50.8	G ¹ / ₄	28.5	39.0	3.25
094	227.0	187.0	54.7	19.0	126.0	84.0	26.0	4	M10	20.0	46.0	65.0	G ¹ / ₄	38.0	50.0	6.54
103	230.0	188.5	58.0	22.0	175.0		25.5	4	M10	16.0	72.1	102.0	G ¹ / ₄			9.60
124	294.0	239.0	68.0	25.0	156.0	100.0	31.0	4	M12	24.0	55.0	77.8	G ³ / ₈	50.0	56.0	12.50
144	357.0	306.0	84.0	28.6	200.0	127.0	38.0	4	M16	28.6	69.9	98.8	G ¹ / ₂	57.0	63.5	20.91
164	525.0	425.0	125.0	41.0	274.0	175.0	55.0	4	M24	38.0	108.0	152.7	G ¹ / ₂	85.0	90.0	39.77
184	680.0	554.0	162.0	57.0	360.0	286.0	78.0	4	M30	50.0	160.0	226.3	G ¹ / ₂	115.0	130.0	77.60
204	680.0	554.0	162.0	73.0	620.0	286.0	100.0	8	M30	50.0	160.0	226.3	G1	150.0	170.0	184.60
304	680.0	554.0	162.0	73.0	880.0	286.0	100.0	8	M30	50.0	160.0	226.3	G1	150.0	170.0	273.00