




SEND A "STANDALONE" COMMAND (START/STOP CONVERT)

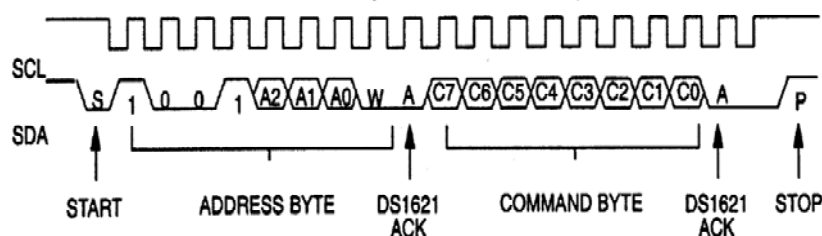


WRITE TO A SINGLE-BYTE REGISTER (CONFIGURATION)

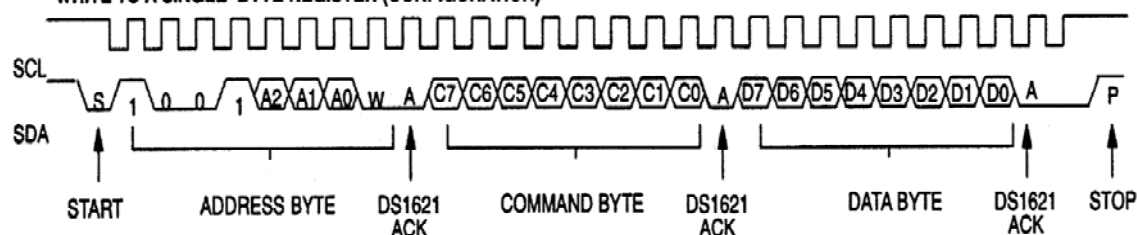

WRITE TO A TWO-BYTE REGISTER (T_H, T_L)

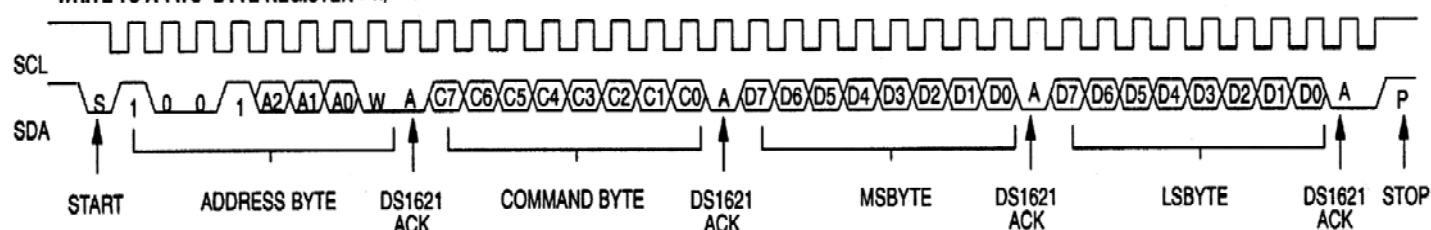

READ FROM A SINGLE-BYTE REGISTER (CONFIGURATION, SLOPE, COUNTER)

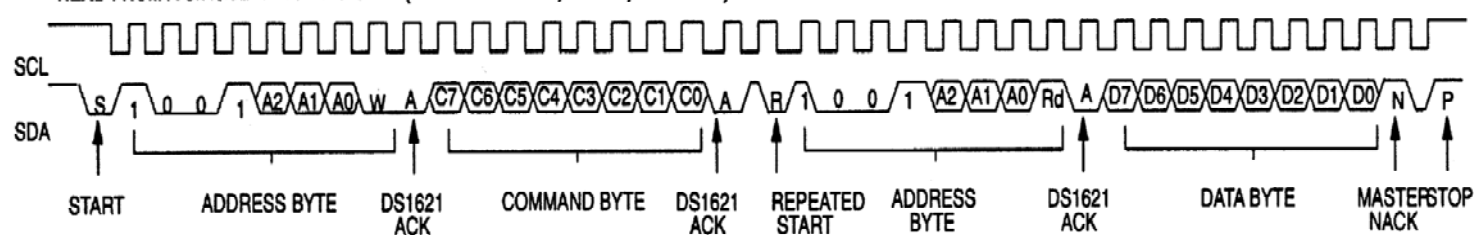

READ FROM A TWO-BYTE REGISTER (T_H, T_L, TEMPERATURE)

