


Extrait du catalogue fournisseur (Sabot métallique)

Références	Valeurs caractéristiques - Bois sur béton ou acier											
	Fixations				Valeurs caractéristiques - Bois C24 [kN]							
	Porteur		Porté		R _{1,k}		R _{2,k}		R _{3,k}		R _{4,k}	
	Qté	Type	Qté	Type	CNA4,0x35	CNA4,0x50	CNA4,0x35	CNA4,0x50	CNA4,0x35	CNA4,0x50	CNA4,0x35	CNA4,0x50
GLE720/100/2,5	6	Ø12*	26	CNA**	-	75.4	-	46.1	-	24.1	-	15
GLE780/100/2,5	6	Ø12*	29	CNA**	-	79.1	-	51.4	-	24.1	-	15
GLE540/120/2,5	4	Ø12*	17	CNA**	-	52.7	-	30.1	-	20	-	10
GLE600/120/2,5	4	Ø12*	20	CNA**	-	52.7	-	35.5	-	20	-	10
GLE780/120/2,5	6	Ø12*	29	CNA**	-	79.1	-	51.4	-	24.1	-	15
GLE840/120/2,5	6	Ø12*	32	CNA**	-	79.1	-	56.7	-	24.1	-	15

Valeurs caractéristiques - Bois sur béton

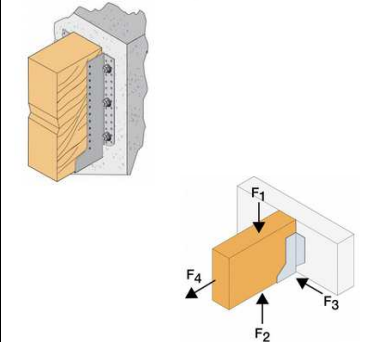

Références	Dimensions poutre [mm]				Dimensions [mm]						Perçages sur porteur		Perçages sur porté
	Largeur		Hauteur		A	B	C	D	F	t	Ø5	Ø13	Ø5
	Min.	Max.	Min.	Max.									
GLE720/100/2,5	98	100	320	465	100	310	90	38.5	95	2.5	46	6	26
GLE780/100/2,5	98	100	350	510	100	340	90	38.5	95	2.5	48	6	29
GLE540/120/2,5	118	120	220	315	120	210	90	38.5	95	2.5	30	4	17
GLE600/120/2,5	118	120	250	360	120	240	90	38.5	95	2.5	36	4	20
GLE780/140/2,5	138	140	330	480	140	320	90	38.5	95	2.5	48	6	29
GLE840/140/2,5	138	140	360	525	140	350	90	38.5	95	2.5	54	6	32

